



German Heritage Since 1993

sunways
Photovoltaic Technology



+

CONTENT

01 COMPANY PROFILE 04-07

02 PRODUCTS 08-29


03 MONITORING 30-32

04 WHY US 33-34

05 CASE STUDY 35-42



01 COMPANY PROFILE

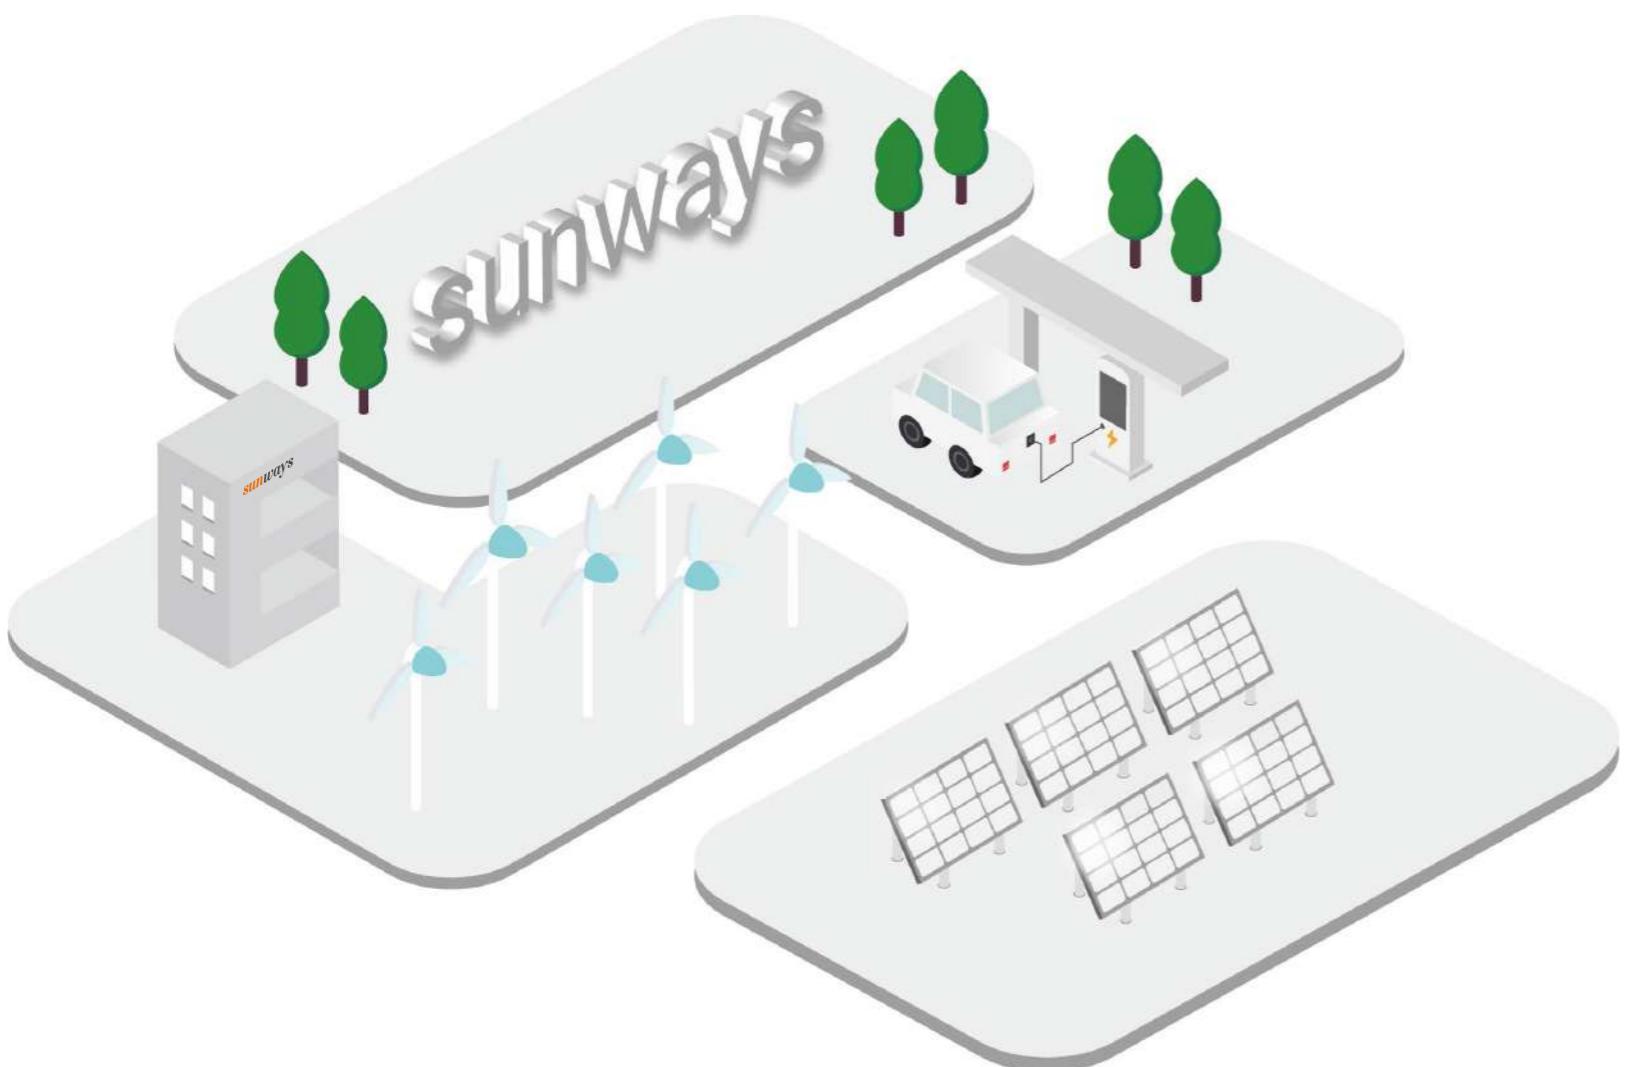

WHO WE ARE

Sunways History

German Heritage Since 1993

Sunways, formerly known as Sunways AG founded in Konstanz, Germany in 1993, was acquired by Shunfeng International Clean Energy Group (SFCE) in 2014. SFCE, also Suntech's parent company, is one of the world's largest suppliers of low-carbon and energy-saving integrated solutions. Sunways has a long standing reputation for technological innovation in the development and manufacturing of PV inverters, solar energy storage and PV integration solutions. After nearly 30 years of research and development, Sunways high-quality PV inverters are widely used in more than 50 countries and regions making the company one of the longest established PV energy suppliers in the industry.

Production Capacity and Scale

For economies of scale reasons, Sunways production has now moved to Cixi, China while German technical standards are still in use and practice. These include the material selection criteria, software control algorithm, R&D processing procedures, test standards and production management system process. The production facility in China is around 4000m² in size, with an inverter production capacity of about 10,000 units per month. This will soon increase to 20,000 units per month through further production line expansion.

R&D Excellence

Sunways has a professional global R&D and management team and they have focused on technological innovation as one of Sunways' core competences. With two international R&D centers in Germany and China, it maintains good technical links and cooperation with many scientific research institutions, such as the Konstanz International Solar Energy Research Center in Germany and the University of Freiburg. The products are accredited to multi-national standards with certification in global markets, such as China, Germany, Poland, Spain, Australia, Brazil and India.

Quality Management

Sunways treats product quality as its life, from supplier inspection, incoming quality inspection, process inspection to finished product inspection, we are not just setting a series of strict, integrated quality control systems, but also have the most advanced testing laboratory to carry out a series of rigorous tests on batch products, and batch sampling and tracking the quality of finished products. Years of tempering and best practices contribute to the first impression of Sunways, quality assurance is guaranteed, utilising only the best in tier one components and best practice inspection processes at every stage.

WHO WE ARE

Sunways company's milestones

- 1993 Foundation of Sunways GmbH in Konstanz
- 1999 Transformation into "Aktiengesellschaft" (joint stock corporation)
- 2001 Listing on the Frankfurt stock exchange
- 2003 Award as "TOP 100" company for outstanding innovation management
- 2004 Opening of office in Barcelona (Spain)
- 2005 Opening of Sunways Production GmbH in Arnstadt (Germany)
- 2006 Opening of office in Bologna (Italy)
- 2008 Winner of "Solar Technology fast 50" company
- 2012 The innovative storage solution has been issued
- 2014 SFCE group takes over Sunways BIPV cells and inverter business
- 2018 Sunways experts team started new product development at its advanced facility
- 2019 Sunways STS & STT series string inverters certified by TUV and started testing in the market
- 2020 Expanded our inverter power range up to 136kW which makes our production line enter into a new stage
- 2021 Sunways STH three-phase hybrid inverter received a lot of attention and orders as soon as it was released to the market

OUR PRESENCE



STRATEGIC PARTNERS



02 PRODUCTS

WHAT WE HAVE



Single Phase Series
STS-1~3.3KTL-S




Smart Three Phase Series
STT-4~25KTL



Single Phase Series
STS-3~6KTL




Single Phase Storage Series
STH-3~8KTL-HS

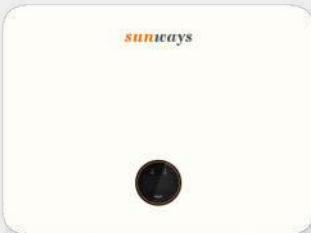


Single Phase Series
STS-7~11KTL



Three Phase Storage Series
STH-4~12KTL-HT

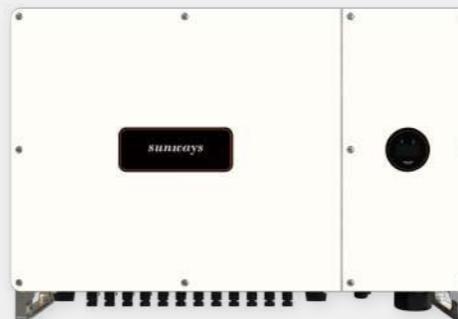

Industrial Three Phase Series
STT-50~60KTL

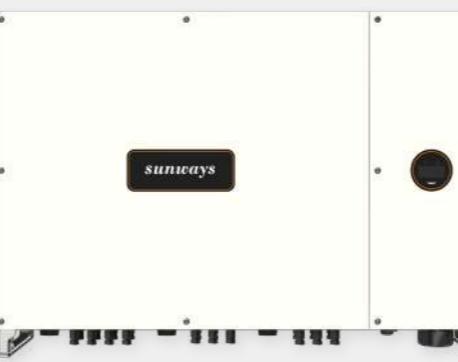

Industrial Three Phase Series
STT-80~125KTL



Data Logger
ST Logger 1000



Monitoring Devices
WiFi Module , GPRS Module



Monitoring Devices
LAN Module

PRODUCT INTRODUCTION

Sunways Single Phase with Single MPPT
S T S - 1 K ~ 3 . 3 K T L - S



MAX 97.5% EFFICIENCY

IP65 PROTECTION

- High reliability due to good heat dissipation design
- Integrated lightning protection for both DC and AC
- Adapt to complex power grid
- High anti-corrosion ability with aluminum alloy die casting technology
- IP65, wider working temperature and altitude, adapt to various installation environments



SAFE & RELIABLE

- High yield with Max. 97.5% efficiency
- European weighted efficiency 97%
- Wide MPPT voltage range
- Up to 10% continuous output overloading capacity
- Single MPPT design with precise MPPT algorithm



HIGH YIELD

- Compact elegant design, light weight, one-person installation
- Plug and play connectors, easy for installation
- Support wireless and wired internet connection (RS485/Wi-Fi/GPRS/LAN optional)
- Remote upgrading available
- Fast and easy configuration via App or OLED display



EASY TO USE

Technical Parameters

Single Phase:STS-1K~3.3KTL-S

Model	STS-1KTL-S	STS-1.5KTL-S	STS-2KTL-S	STS-2.5KTL-S	STS-3KTL-S	STS-3.3KTL-S*
Input						
Max. Input Power (W)	1,300	1,950	2,600	3,250	3,900	3,900
Start-up Voltage (V)	60	60	60	60	60	60
Min. DC Voltage (V)	55	55	55	55	55	55
Max. DC Input Voltage (V)	500	500	500	500	500	500
Rated DC Input Voltage (V)	360	360	360	360	360	360
MPPT Voltage Range (V)	80-450	80-450	80-450	80-450	80-450	80-450
No. of MPP Trackers	1	1	1	1	1	1
No. of DC Inputs per MPPT	1	1	1	1	1	1
Max. Input Current (A)	12.5	12.5	12.5	12.5	12.5	12.5
Max. Short-circuit Current (A)	15	15	15	15	15	15
Output						
Rated Output Power (W)	1,000	1,500	2,000	2,500	3,000	3,300
Max. Output Power (W)	1,100	1,650	2,200	2,750	3,300	3,300
Max. Apparent Power (VA)	1,100	1,650	2,200	2,750	3,300	3,300
Rated Output Voltage (V)	220/230					
Rated AC Frequency (Hz)	50/60Hz 45-55Hz/55-65Hz					
Max. Output Current (A)	4.8	7.2	9.6	12	14.4	14.4
Power Factor	0.8 leading ...0.8 lagging					
Max. Total Harmonic Distortion	< 3% @Rated Output Power					
DCI	< 0.5%in					
Efficiency						
Max. Efficiency	97.3%	97.3%	97.5%	97.5%	97.5%	97.5%
European Efficiency	96.4%	96.4%	97.0%	97.0%	97.0%	97.0%
MPPT Efficiency	99.9%	99.9%	99.9%	99.9%	99.9%	99.9%
Protection						
DC Reverse Polarity Protection	Integrated					
Insulation Resistance Protection	Integrated					
DC Switch	Optional					
Surge Protection	Integrated					
Over-temperature Protection	Integrated					
Residual Current Protection	Integrated					
Islanding Protection	Integrated					
AC Short-circuit Protection	Integrated					
AC Over-voltage Protection	Integrated					
General Data						
Dimensions (mm)	327W*297H*114D					
Weight (kg)	6.5					
Protection Degree	IP65					
Self-consumption at Night (W)	< 1					
Topology	Transformer less					
Operating Temperature Range (°C)	-30~60					
Relative Humidity (%)	0~100					
Operating Altitude (m)	4000 (derating@ > 3000)					
Cooling	Natural Convection					
Noise Level (dB)	< 25					
Display	OLED & LED					
Communication	RS485/WiFi/GPRS/LAN (Optional)					
Compliance	NB/T32004、IEC62109、IEC62116、VDE4105、VDE0126、UTE C15-712-1、AS4777、C10/11、CEI0-21、RD1699、NBR16149、IEC61727、IEC60068、IEC61683、EN50549、EN61000					

* : STS 3.3KTL-S available for India only.

PRODUCT INTRODUCTION

Sunways Single Phase with Dual MPPT
S T S - 3 K ~ 6 K T L



MAX 98.1% EFFICIENCY

IP65 PROTECTION



SAFE & RELIABLE

- High reliability due to good heat dissipation design
- Integrated lightning protection for both DC and AC
- Adapt to complex power grid
- High anti-corrosion ability with aluminum alloy die casting technology
- IP65, wider working temperature and altitude, adapt to various installation environments



HIGH YIELD

- High yield with Max. 98.1% efficiency
- European weighted efficiency 97.5%
- Wide MPPT voltage range
- Up to 10% continuous output overloading capacity
- Dual MPPT design with precise MPPT algorithm



EASY TO USE

- Compact elegant design, light weight, one-person installation
- Plug and play connectors, easy for installation
- Support wireless and wired internet connection (RS485/Wi-Fi/GPRS/LAN optional)
- Remote upgrading available
- Fast and easy configuration via App or OLED display

Technical Parameters

Single Phase:STS-3K~6KTL

Model	STS-3KTL	STS-3.6KTL	STS-4.2KTL	STS-4.6KTL	STS-5KTL	STS-6KTL
Input						
Max. Input Power (W)	3,900	4,680	5,460	5,980	6,500	7,800
Start-up Voltage (V)	120	120	120	120	120	120
Min. DC Voltage (V)	100	100	100	100	100	100
Max. DC Input Voltage (V)	600	600	600	600	600	600
Rated DC Input Voltage (V)	360	360	360	360	360	360
MPPT Voltage Range (V)	100-550	100-550	100-550	100-550	100-550	100-550
No. of MPP Trackers	2	2	2	2	2	2
No. of DC Inputs per MPPT	1/1	1/1	1/1	1/1	1/1	1/1
Max. Input Current (A)	12.5/12.5	12.5/12.5	12.5/12.5	12.5/12.5	12.5/12.5	12.5/12.5
Max. Short-circuit Current (A)	15/15	15/15	15/15	15/15	15/15	15/15
Output						
Rated Output Power (W)	3,000	3,600	4,200	4,600	5,000	6,000
Max. Output Power (W)	3,300	3,960	4,600	4,600	5,500 *	6,600
Max. Apparent Power (VA)	3,300	3,960	4,600	4,600	5,500 *	6,600
Rated Output Voltage (V)	220/230					
Rated AC Frequency (Hz)	50/60Hz 45-55Hz/55-65Hz					
Max. Output Current for each MPPT (A)	15	18	21	21	25 **	28.7
Power Factor	0.8 leading ... 0.8 lagging					
Max. Total Harmonic Distortion	<3% @Rated Output Power					
DCI	<0.5%ln					
Efficiency						
Max. Efficiency	98.1%	98.1%	98.1%	98.1%	98.1%	98.1%
European Efficiency	97.5%	97.5%	97.5%	97.5%	97.5%	97.5%
MPPT Efficiency	99.9%	99.9%	99.9%	99.9%	99.9%	99.9%
Protection						
DC Reverse Polarity Protection	Integrated					
Insulation Resistance Protection	Integrated					
DC Switch	Optional					
Surge Protection	Integrated					
Over-temperature Protection	Integrated					
Residual Current Protection	Integrated					
Islanding Protection	Integrated					
AC Short-circuit Protection	Integrated					
AC Over-voltage Protection	Integrated					
General Data						
Dimensions (mm)	410W*360H*120D					
Weight (kg)	13					
Protection Degree	IP65					
Self-consumption at Night (W)	<1					
Topology	Transformer less					
Operating Temperature Range (°C)	-30~60					
Relative Humidity (%)	0~100					
Operating Altitude (m)	4000 (derating@ > 3000)					
Cooling	Natural Convection					
Noise Level (dB)	< 25					
Display	OLED & LED					
Communication	RS485/WiFi/GPRS/LAN (Optional)					
Compliance	NB/T32004、IEC62109、IEC62116、VDE4105、VDE0126、UTE C15-712-1、AS4777、C10/11、CEI0-21、RD1699、NBR16149、IEC61727、IEC60068、IEC61683、EN50549、EN61000					

* : 5000 for Belgium.

** : 21.7 for Belgium.

PRODUCT INTRODUCTION

Sunways Single Phase with Dual MPPT
S T S - 7 K ~ 1 1 K T L



MAX 98.1% EFFICIENCY

IP65 PROTECTION



SAFE & RELIABLE

- High reliability due to good heat dissipation design
- Integrated lightning protection for both DC and AC
- Adapt to complex power grid
- High anti-corrosion ability with aluminum alloy die casting technology
- IP65, wider working temperature and altitude, adapt to various installation environments



HIGH YIELD

- High yield with Max. 98.1% efficiency
- European weighted efficiency 97.6%
- Wide MPPT voltage range
- Up to 10% continuous output overloading capacity
- Dual MPPT design with precise MPPT algorithm



EASY TO USE

- Compact elegant design, light weight, one-person installation
- Plug and play connectors, easy for installation
- Support wireless and wired internet connection (RS485/Wi-Fi/GPRS/LAN optional)
- Remote upgrading available
- Fast and easy configuration via App or OLED display

Technical Parameters

Single Phase:STS-7K~11KTL

Model	STS-7KTL	STS-8KTL	STS-9KTL	STS-10KTL	STS-11KTL
Input					
Max. Input Power (W)	9,100	10,400	11,700	13,000	14,300
Start-up Voltage (V)	80	80	80	80	80
Max. DC Input Voltage (V)	600	600	600	600	600
Rated DC Input Voltage (V)	360	360	360	360	360
MPPT Voltage Range (V)	80-550	80-550	80-550	80-550	80~550
No. of MPP Trackers	2	2	2	2	2
No. of DC Inputs per MPPT	1/2	1/2	1/2	1/2	1/2
Max. Input Current (A)	15/30	15/30	15/30	15/30	15/30
Max. Short-circuit Current (A)	18/36	18/36	18/36	18/36	18/36
Output					
Rated Output Power (W)	7,000	8,000	9,000	10,000	11,000
Max. Output Power (W)	7,700	8,800	9,900	11,000	11,000
AC output rated apparent power (VA)	7,000	8,000	9,000	10,000	11,000
Max. Apparent Power (VA)	7,700	8,800	9,900	11,000	11,000
Rated Output Voltage (V)			220/230		
Rated AC Frequency (Hz)			50/60		
AC output rated current (A)	30.4	34.8	40.9	43.5	47.8
Max. Output Current (A)	35	36.5	45	45.6	47.8
Power Factor			0.8 leading ...0.8 lagging		
Max. total harmonic distortion			<3% @Rated Output Power		
DCI			< 0.5%ln		
Efficiency					
Max. Efficiency	98.1%	98.1%	98.1%	98.1%	98.1%
European Efficiency	97.6%	97.6%	97.6%	97.6%	97.6%
MPPT Efficiency	99.9%	99.9%	99.9%	99.9%	99.9%
Protection					
DC Reverse Polarity Protection			Integrated		
Insulation Resistance Protection			Integrated		
DC Switch			Opcional		
Surge Protection			Integrated		
Over-temperature Protection			Integrated		
Residual Current Protection			Integrated		
Islanding Protection			Integrated		
AC Short-circuit Protection			Integrated		
AC Over-voltage Protection			Integrated		
General Data					
Dimensions (mm)			550W*410H*175D		
Weight (KG)	24		26		
Protection Degree			IP65		
Self-consumption at Night (W)			< 1		
Topology			Sem Transformador		
Operating Temperature Range (oC)			-30~60		
Relative Humidity (%)			0~100		
Operating Altitude (m)			4000 (depreciativo@ > 3000)		
Cooling	Natural Convection		Smart Fan Cooling		
Noise Level (dB)	< 25		< 40		
Display			OLED & LED		
Communication			RS485/WiFi/GPRS/LAN (Opcional)		
Compliance	NB/T32004、IEC62109、IEC62116、VDE4105、VDE0126、UTE C15-712-1、AS4777、C10/11、CEI0-21、RD1699、NBR16149、IEC61727、IEC60068、IEC61683、EN50549、EN61000				

PRODUCT INTRODUCTION

Sunways Three Phase with Dual MPPT
S T T - 4 K ~ 2 5 K T L - P



MAX 98.6% EFFICIENCY

IP65 PROTECTION



SAFE & RELIABLE

- High reliability due to good heat dissipation design
- Integrated lightning protection for both DC and AC
- Adapt to complex power grid
- High anti-corrosion ability with aluminum alloy die casting technology
- IP65, wider working temperature and altitude, adapt to various installation environments



HIGH YIELD

- High yield with Max. 98.6% efficiency
- European weighted efficiency 98.2%
- Longer working hours due to the lower start-up voltage and wider MPPT range
- Up to 10% continuous output overloading capacity
- Dual MPPT design with precise MPPT algorithm
- With a max input current of 15A, compatible with high-power panels



EASY TO USE

- Support wireless and wired internet connection (RS485/Wi-Fi/GPRS/LAN optional)
- Remote upgrading available
- Fast and easy configuration via App or OLED display

Technical Parameters

Three Phase:STT-4K~25KTL-P

Model	STT-4KTL-P	STT-5KTL-P	STT-6KTL-P	STT-8KTL-P	STT-10KTL-P	STT-12KTL-P	STT-15KTL-P	STT-17KTL-P	STT-20KTL-P	STT-25KTL-P										
Input																				
Max. Input Power (W)	5,200	6,500	7,800	10,400	13,000	15,600	19,500	22,100	26,000	32,500										
Start-up Voltage (V)	180	180	180	180	180	180	180	180	180	180										
Min. DC Voltage (V)	150	150	150	150	150	150	150	150	150	150										
Max. DC Input Voltage (V)	1,100	1,100	1,100	1,100	1,100	1,100	1,100	1,100	1,100	1,100										
Rated DC Input Voltage (V)	620	620	620	620	620	620	620	620	620	620										
MPPT Voltage Range (V)	160-1000	160-1000	160-1000	160-1000	160-1000	160-1000	160-1000	160-1000	160-1000	160-1000										
No. of MPP Trackers	2	2	2	2	2	2	2	2	2	2										
No. of DC Inputs per MPPT	1/1	1/1	1/1	1/1	1/1	1/1	1/2	2/2	2/2	2/2										
Max. Input Current (A)	15/15 ^①	15/15 ^①	15/15 ^①	15/15 ^①	15/15 ^①	15/15 ^①	15/30 ^①	30/30 ^①	30/30 ^①	30/30 ^①										
Max. Short-circuit Current (A)	20/20	20/20	20/20	20/20	20/20	20/20	20/40	40/40	40/40	40/40										
Output																				
Rated Output Power (W)	4,000	5,000	6,000	8,000	10,000	12,000	15,000	17,000	20,000	25,000										
Max. Output Power (W)	4,400	5,500	6,600	8,800	11,000	13,200	16,500	18,700	22,000	25,000										
Max. Apparent Power (VA)	4,400	5,500	6,600	8,800	11,000	13,200	16,500	18,700	22,000	25,000										
Rated Output Voltage (V)	3L/N/PE, 230/400V																			
Rated AC Frequency (Hz)	50/60Hz 45-55Hz/55-65Hz																			
Max. Output Current (A)	6.7	8.4	10	13.3	16.5	20	25	28.4	31.9	39										
Power Factor	0.8 leading ---0.8 lagging																			
Max. Total Harmonic Distortion	< 3% @Rated Output Power																			
DCI	< 0.5%ln																			
Efficiency																				
Max. Efficiency	98.1%	98.1%	98.3%	98.3%	98.6%	98.6%	98.6%	98.6%	98.6%	98.6%										
European Efficiency	97.9%	97.9%	98.0%	98.0%	98.2%	98.2%	98.2%	98.2%	98.2%	98.2%										
MPPT Efficiency	99.9%	99.9%	99.9%	99.9%	99.9%	99.9%	99.9%	99.9%	99.9%	99.9%										
Protection																				
DC Reverse Polarity Protection	Integrated																			
Insulation Resistance Protection	Integrated																			
DC Switch	Optional																			
Surge Protection	Integrated																			
Over-temperature Protection	Integrated																			
Residual Current Protection	Integrated																			
Anti-islanding Protection	Integrated																			
AC Short-circuit Protection	Integrated																			
AC Over-voltage Protection	Integrated																			
General Data																				
Dimensions (mm)	550W*410H*175D																			
Weight (kg)	23				26				29											
Protection Degree	IP65																			
Self-consumption at Night (W)	< 1																			
Topology	Transformer less																			
Operating Temperature Range (°C)	-30~60																			
Relative Humidity (%)	0~100																			
Operating Altitude (m)	4000 (derating@> 3000)																			
Cooling	Natural Convection				Smart Fan Cooling				< 40											
Noise Level (dB)	< 25				OLED & LED															
Communication	RS485/WiFi/GPRS/LAN (Optional)																			
Compliance	NB/T32004、IEC62109、IEC62116、VDE4105、VDE0126、UTE C15-712-1、AS4777、C10/11、CEI0-21、RD1699、NBR16149、IEC61727、IEC60068、IEC61683、EN50549、EN61000																			

① STT-4~25KTL series maximum input current per string is 11A, products deliver upon the order

PRODUCT INTRODUCTION

Sunways Three Phase with Six MPPT

STT-50K/60KTL-P

MAX 98.8% EFFICIENCY

IP65 PROTECTION



SAFE & RELIABLE

- High reliability due to good heat dissipation design
- Integrated lightning protection for both DC and AC
- Adapt to complex power grid
- High anti-corrosion ability with aluminum alloy technology
- IP65, wider working temperature and altitude, adapt to various installation environments



HIGH YIELD

- High yield with Max. 98.8% efficiency
- European weighted efficiency 98.3%
- Wide MPPT voltage range
- Up to 10% continuous output overloading capacity
- Six MPPT design, lower PV string mismatch loss
- Optional anti-PID function integrated
- DC 2 in 1 connection enabled, compatible with max 17A high-power panel



EASY TO USE

- String monitoring, improve O&M efficiency
- Support wireless and wired internet connection (RS485, Wi-Fi/GPRS/LAN optional)
- Remote upgrading available
- Intelligent positioning abnormal string with integrated I/V scan function

Technical Parameters

Three Phase:STT-50K/60KTL-P

Model	STT-50KTL-P	STT-60KTL-P
Input		
Max. Input Power (W)	65,000	78,000
Start-up Voltage (V)	200	200
Min. DC Voltage (V)	180	180
Max. DC Input Voltage (V)	1,100	1,100
Rated DC Input Voltage (V)	620	620
MPPT Voltage Range (V)	160-1000	160-1000
No. of MPP Trackers	6	6
No. of DC Inputs	12	12
Max. Input Current (A)	26/26/26/26/26/26 ^①	26/26/26/26/26/26 ^①
Max. Short-circuit Current (A)	40/40/40/40/40/40	40/40/40/40/40/40
Output		
Rated Output Power (W)	50,000	60,000
Max. Output Power (W)	55,000	66,000
Max. Apparent Power (VA)	55,000	66,000
Rated Output Voltage (V)	3L/N/PE, 230/400V	
Rated AC Frequency (Hz)	50/60Hz 45-55Hz/55-65Hz	
Max. Output Current (A)	83.6	95.3
Power Factor	0.8 leading...0.8 lagging	
Max. Total Harmonic Distortion	< 3% @ Rated Output Power	
DCI	< 0.5% In	
Efficiency		
Max. Efficiency	98.8%	98.8%
European Efficiency	98.3%	98.3%
MPPT Efficiency	99.9%	99.9%
Protection		
DC Reverse Polarity Protection	Integrated	
Insulation Resistance Protection	Integrated	
DC Switch	Optional	
Surge Protection	Integrated	
Over-temperature Protection	Integrated	
Residual Current Protection	Integrated	
Anti-islanding Protection	Integrated	
AC Short-circuit Protection	Integrated	
AC Over-voltage Protection	Integrated	
PID Protection	Optional	
General Data		
Dimensions (mm)	890W*580H*290D	
Weight (kg)	58	
Protection Degree	IP65	
Self-consumption at Night (W)	< 1	
Topology	Transformer less	
Operating Temperature Range (°C)	-30~60	
Relative Humidity (%)	0~100	
Operating Altitude (m)	4000 (derating@ > 3000)	
Cooling	Smart Fan Cooling	
Noise Level (dB)	< 55	
Display	OLED & LED	
Communication	RS485, WiFi/GPRS/LAN (Optional)	
Compliance	NB/T32004、IEC62109、IEC62116、VDE4105、VDE0126、AS4777、C10/11、CE10-21、RD1699、NBR16149、IEC61727、IEC60068、IEC61683、EN50549、EN61000	

① STT-50/60KTL series maximum input current per MPPT is 22A, products delivered upon order

PRODUCT INTRODUCTION

Sunways Three Phase with Eight/Ten MPPT
STT-80K~110KTL、100K/125KTL-HV



MAX 98.8% EFFICIENCY

IP65 PROTECTION



INTELLIGENT

- Intelligent positioning abnormal string with integrated I/V scan function
- Real-time fault curve recording, improve O&M efficiency
- IP68 intelligent fans, lower operation temperature, longer lifespan
- Intelligent quad-core processor, information processing more comprehensive, fast, and efficient



HIGH YIELD

- High yield with Max. 98.8% efficiency
- Up to 10% continuous output overloading capacity
- 8/10 MPPT design, lower PV string mismatch loss
- Optional PID recovery function
- DC 2 in 1 connection enabled, compatible with max 17A high-power panel



CONVENIENCE

- Support wireless and wired internet connection (RS485, Wi-Fi/GPRS/LAN optional)
- Remote upgrading available
- Fast and easy commissioning via App or OLED display

Technical Parameters

Three Phase:STT-80K~110KTL、100K/125KTL-HV

Model	STT-80KTL	STT-100KTL	STT-110KTL	STT-100KTL-HV	STT-125KTL-HV				
Input									
Max. Input Power (W)	104,000	130,000	143,000	130,000	162,500				
Start-up Voltage (V)	200	200	200	200	200				
Min. DC Voltage (V)	180	180	180	180	180				
Max. DC Input Voltage (V)	1,100	1,100	1,100	1,100	1,100				
Rated DC Input Voltage (V)	620	620	620	750	750				
MPPT Voltage Range (V)	200-950	200-950	200-950	200-950	200-950				
No. of MPP Trackers	8	10	10	10	10				
No. of DC Inputs	16	20	20	20	20				
Max. Input Current (A)	8*26	10*26	10*26	10*26	10*26				
Max. Short-circuit Current (A)	8*40	10*40	10*40	10*40	10*40				
Output									
Rated Output Power (W)	80,000	100,000	110,000	100,000	125,000				
Max. Output Power (W)	88,000	110,000	121,000	110,000	137,500				
Max. Apparent Power (VA)	88,000	110,000	121,000	110,000	137,500				
Rated Output Voltage (V)	3L/N/PE, 230/400V				3/PE,288/500V				
Rated AC Frequency (Hz)	50/60Hz				45-55Hz/55-65Hz				
Max. Output Current (A)	127	158.8	174.8	127	158.8				
Power Factor	0.8 leading---0.8 lagging								
Max. Total Harmonic Distortion	< 3% @ Rated Output Power								
DCI	< 0.5% In								
Efficiency									
Max. Efficiency	98.8%	98.8%	98.8%	98.8%	98.8%				
European Efficiency	98.3%	98.3%	98.3%	98.3%	98.3%				
MPPT Efficiency	99.9%	99.9%	99.9%	99.9%	99.9%				
Protection									
DC Reverse Polarity Protection	Integrated								
Insulation Resistance Protection	Integrated								
DC Switch	Optional								
Surge Protection	Integrated								
Over-temperature Protection	Integrated								
Residual Current Protection	Integrated								
Anti-islanding Protection	Integrated								
AC Short-circuit Protection	Integrated								
AC Over-voltage Protection	Integrated								
PID Protection	Optional								
General Data									
Dimensions (mm)	1015W*680H*290D								
Weight (kg)	79	82							
Protection Degree	IP65								
Self-consumption at Night (W)	< 1								
Topology	Transformer less								
Operating Temperature Range (°C)	-30~60								
Relative Humidity (%)	0~100								
Operating Altitude (m)	4000 (derating@ > 3000)								
Cooling	Smart Fan Cooling								
Noise Level (dB)	< 55								
Display	OLED & LED								
Communication	RS485, WiFi/GPRS/LAN (Optional)								
Compliance	NB/T32004、IEC62109、IEC62116、IEC61727、IEC60068、IEC61683、EN50549、EN61000								

PRODUCT INTRODUCTION

Sunways Single Phase Storage Inverter with Two MPPT


STH-3~3.6KTL-HSS, STH-3K~8KTL-HS

MAX 97.6% EFFICIENCY

IP65 PROTECTION



- Max. efficiency up to 97.6%
- With AC output ranging from 3kW to 8kW
- Powerful load adaptability, support multiple loads stable access
- Oled display+App, two ways for data checking and management
- 100~500V super wide battery voltage range, adapt to bigger capacity battery
- Up to 30A charging and discharging current allows bigger capacity battery accessing and faster charging
- Intelligent EMS management, power dispatching from PV, Battery and Grid is more flexible
- Uninterruptible power supply, switch to off-grid mode within 10ms

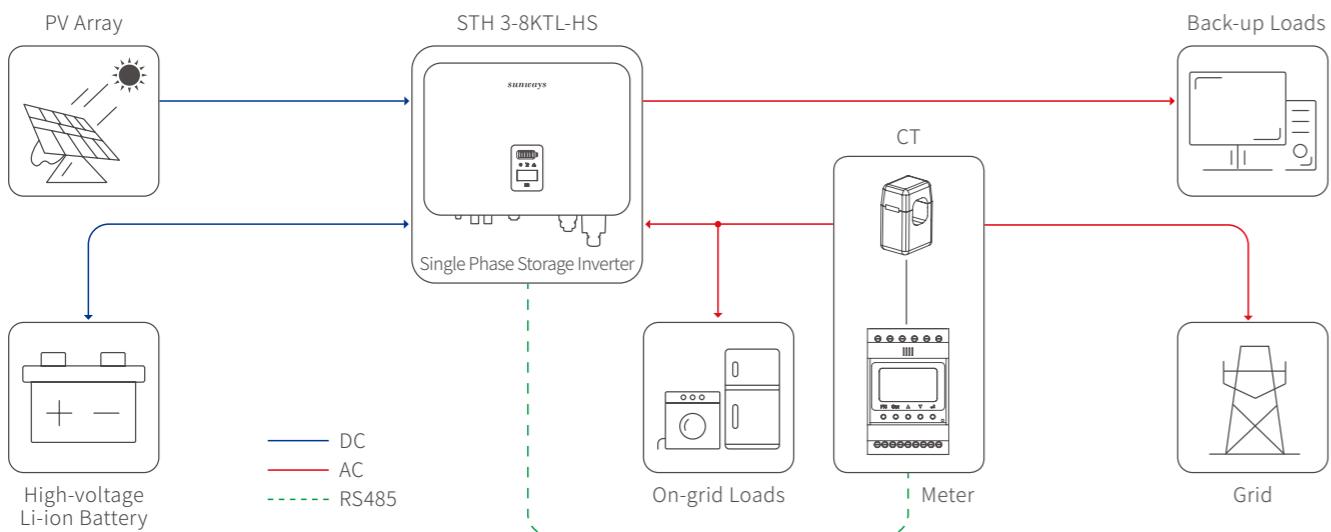

Technical Parameters

Single Phase: STH-3~3.6KTL-HSS, STH-3K~8KTL-HS

Model	STH-3KTL-HSS	STH-3.6KTL-HSS	STH-3KTL-HS	STH-3.6KTL-HS	STH-4.2KTL-HS	STH-4.6KTL-HS	STH-5KTL-HS	STH-6KTL-HS	STH-7KTL-HS	STH-8KTL-HS	
PV Input	Max. Input Power (W)	3,900	4,680	3,900	4,680	5,460	5,980	6,500	7,800	9,100	
	Start-up Voltage (V)	80	80	80	80	80	80	80	80	80	
	Max. DC Input Voltage (V)	600	600	600	600	600	600	600	600	600	
	Rated DC Input Voltage (V)	360	360	360	360	360	360	360	360	360	
	MPPT Voltage Range (V)	100-550	100-550	100-550	100-550	100-550	100-550	100-550	100-550	100-550	
	No. of MPP Trackers	1	1	2	2	2	2	2	2	2	
	No. of PV Inputs per MPPT	1	1	1/1	1/1	1/1	1/1	1/1	1/1	1/1	
	Max. Input Current (A)	15	15	15/15	15/15	15/15	15/15	15/15	15/15	15/15	
	Max. Short-circuit Current (A)	20	20	20/20	20/20	20/20	20/20	20/20	20/20	20/20	
Battery	Battery Type	Lithium Battery (with BMS)									
	Battery Communication Mode	CAN / RS485									
	Battery Voltage Range (V)	85-500									
	Max. Charge/Discharge Current (A)	30/30									
	Rated Current of Built-in Fuse (A)	63									
Output (Grid)	Rated Output Power (W)	3,000	3,600	3,000	3,600	4,200	4,600	5,000/4,990 ^①	6,000	7,000	8,000
	Max. Output Power (W)	3,300	3,960	3,300	3,960	4,600	4,600	5,500/4,990 ^①	6,600	7,700	8,000
	Max. Apparent Power (VA)	3,300	3,960	3,300	3,960	4,600	4,600	5,500/4,990 ^①	6,600	7,700	8,000
	Max. Input Apparent Power (VA)	6,000 ^②	7,200 ^②	6,000 ^②	7,200 ^②	8,400 ^②	9,200 ^②	10,000 ^②	12,000 ^②	12,000 ^②	12,000 ^②
	Max. Charging Power of Battery (W)	3,000	3,600	3,000	3,600	4,200	4,600	5,000/4,990 ^①	6,000	7,000	8,000
	Rated Output Voltage (V)	L/N/PE, 220/230/240V									
	Rated AC Frequency (Hz)	50/60									
	Max. Output Current (A)	15	18	15	18	21	21	25/21.7 ^①	28.7	35	36.3
	Power Factor	0.8 leading ~ 0.8 lagging									
Output (Back-up)	Max. Total Harmonic Distortion	<3% @ Rated Output Power									
	DCI	<0.5%ln									
	UPS Switching Time	<10ms									
Efficiency	Max. Apparent Output Power (VA)	3,300	3,960	3,300	3,960	4,600	4,600	5,500/4,990 ^①	8,800	11,000	13,200
	Peak Output Apparent Power (VA)	3,900 ^③ , 60s	4,700 ^③ , 60s	3,900 ^③ , 60s	4,700 ^③ , 60s	5,500 ^③ , 60s	6,000 ^③ , 60s	6,500 ^③ , 60s	7,800 ^③ , 60s	9,100 ^③ , 60s	10,000 ^③ , 60s
	Voltage Harmonic Distortion	<3% @ Linear Load									
Protection	Max. Efficiency	97.6%	97.6%	97.6%	97.6%	97.6%	97.6%	97.6%	97.6%	97.6%	97.6%
	European Efficiency	97.0%	97.0%	97.0%	97.0%	97.0%	97.0%	97.0%	97.0%	97.0%	97.0%
	Max. Battery Charging Conversion Efficiency	96.6%	96.6%	96.6%	96.6%	96.6%	96.6%	96.6%	96.6%	96.6%	96.6%
	Max. Battery Discharge Conversion Efficiency	96.6%	96.6%	96.6%	96.6%	96.6%	96.6%	96.6%	96.6%	96.6%	96.6%
General Data											
Over Voltage Category										PV: II ; Main: III	
Dimensions (mm)										550W*410H*175D	
Weight (kg)										26	
Protection Degree										IP65	
Self-consumption at Night (W)										<15	
Topology										Transformer less	
Operating Temperature Range (°C)										-30~60	
Relative Humidity (%)										0~100	
Operating Altitude (m)										4000 (derating@ > 3000)	
Cooling										Natural Convection	
Noise Level (dB)										<25	
Display										OLED & LED	
Communication										WiFi / LAN (Optional)	
Compliance											
IEC62109, IEC62116, VDE4105, VDE0126, AS4777, RD1699, NBR16149, IEC61727, IEC60068, IEC61683, EN50549, EN61000											

① The grid feed in power for AS/NZS 4777.2 is limited 4.99kW & 4.99kVA & 21.7A.

② Max apparent power from the grid means the maximum power imported from the utility grid used to satisfy the backup loads and charge the battery.

③ The output power will exceed the rated value only when the power in the PV array is sufficient, and the duration of the overload is relating to the overload power.

PRODUCT INTRODUCTION

Sunways Three Phase Storage Inverter with Two MPPT


STH - 4 K ~ 12 KTL - HT

MAX 98.2% EFFICIENCY

IP65 PROTECTION



- Max. efficiency up to 98.2%
- Support unbalanced output on both on-grid and back-up side
- Powerful load adaptability, support multiple loads stable access
- Oled display+App, two ways for data checking and management
- 180~750V super wide battery voltage range, adapt to bigger capacity battery
- New pin type AC connector introduced, easy to use and safer
- Intelligent EMS management, power dispatching from PV, Battery and Grid is more flexible
- Uninterruptible power supply, switch to off-grid mode within 10ms

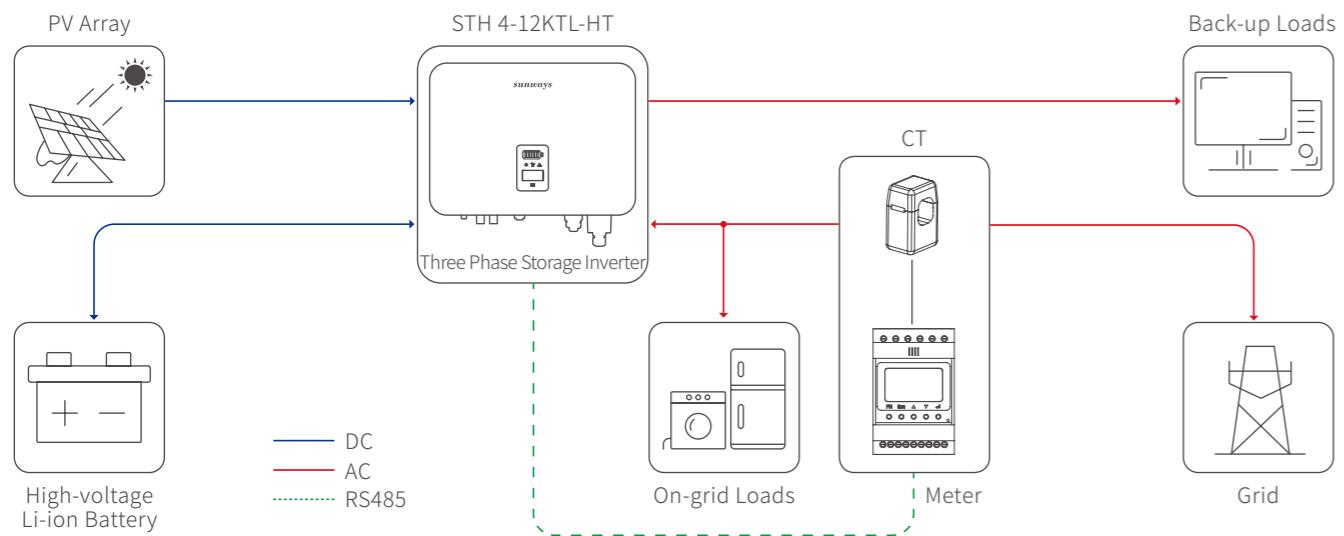

Technical Parameters

Three Phase: STH-4K~12KTL-HT

Model	STH-4KTL-HT	STH-5KTL-HT	STH-6KTL-HT	STH-8KTL-HT	STH-10KTL-HT	STH-12KTL-HT
PV Input	Max. Input Power (W)	5,200	6,500	7,800	10,400	13,000
	Start-up Voltage (V)	150	150	180	180	180
	Max. DC Input Voltage (V)	1,000	1,000	1,000	1,000	1,000
	Rated DC Input Voltage (V)	620	620	620	620	620
	MPPT Voltage Range (V)	150-850	150-850	200-850	200-850	200-850
	No. of MPP Trackers	2	2	2	2	2
	No. of PV Inputs	1/1	1/1	1/1	1/1	1/1
	Max. Input Current (A)	13/13	13/13	13/13	13/13	13/13
Battery	Max. Short-circuit Current (A)	18/18	18/18	18/18	18/18	18/18
	Battery Type	Lithium Battery (with BMS)				
	Battery Communication Mode	CAN / RS485				
	Battery Voltage Range (V)	180-750				
	Max. Charge/Discharge Current (A)	25/25				
	Rated Current of Built-in Fuse (A)	63				
	Rated Output Power (W)	4,000	5,000	6,000	8,000	10,000
	Max. Output Power (W)	4,400	5,500	6,600	8,800	11,000
Output (Grid)	Max. Apparent Power (VA)	4,400	5,500	6,600	8,800	11,000
	Max. Input Apparent Power (VA)	8,000 ^①	10,000 ^①	12,000 ^①	16,000 ^①	16,500 ^①
	Max. Charging Power of Battery (W)	4,000	5,000	6,000	8,000	10,000
	Rated Output Voltage (V)	3L/N/PE, 230/400V				
	Rated AC Frequency (Hz)	50/60Hz 45-55Hz/55-65Hz				
	Max. Output Current (A)	6.7	8.3	10	13.3	16.5
	Power Factor	0.8 leading ...0.8 lagging				
	Max. Total Harmonic Distortion	<3% @Rated Output Power				
Output (Back-up)	DCI	<0.5%In				
	UPS Switching Time	<10ms				
	Rated Output Voltage (V)	3L/N/PE, 230/400V				
	Rated AC Frequency (Hz)	50/60Hz 45-55Hz/55-65Hz				
	Max. Apparent Output Power (VA)	4,400	5,500	6,600	8,800	11,000
	Peak Overload Apparent Power (VA)	8,000 ^② , 60s	10,000 ^② , 60s	12,000 ^② , 60s	16,000 ^② , 60s	20,000 ^② , 60s
	Peak Output Apparent Power/per Phase (VA)	1,600 ^③	2,100 ^③	2,600 ^③	3,300 ^③	4,000 ^③
	Voltage Harmonic Distortion	<3% @Linear Load				
Efficiency	Max. Efficiency	98.1%	98.1%	98.1%	98.2%	98.2%
	European Efficiency	97.3%	97.3%	97.3%	97.4%	97.4%
	Max. Battery Charging Conversion Efficiency	97.2%	97.2%	97.3%	97.3%	97.3%
	Max. Battery Discharge Conversion Efficiency	97.2%	97.2%	97.3%	97.3%	97.3%
Protection						
DC Reverse Polarity Protection						
Battery Input Reverse Connection Protection						
Insulation Resistance Protection						
DC Switch						
Surge Protection						
Over-temperature Protection						
Residual Current Protection						
Islanding Protection						
AC Over-voltage Protection						
Overload Protection						
AC Short-circuit Protection						
General Data						
Dimensions (mm)						
Weight (kg)						
Protection Degree						
Self-consumption at Night (W)						
Topology						
Operating Temperature Range (°C)						
Relative Humidity						
Operating Altitude (m)						
Cooling						
Noise Level (dB)						
Display						
Communication						
Compliance						
IEC62109, IEC62116, VDE4105, VDE0126, AS4777, RD1699, NBR16149, IEC61727, IEC60068, IEC61683, EN50549, EN61000, NRS097-2-1, IEC/EN 62477-1						

① Max apparent power from the grid means the maximum power imported from the utility grid used to satisfy the backup loads and charge the battery.

② The output power will exceed the rated value only when the power in the PV array is sufficient, and the duration of the overload is relating to the overload power.

③ Peak output apparent of power per phase is the max output apparent power that won't trigger the overload protection.

■ PRODUCT INTRODUCTION

WIFI Module



Reliability



Flexibility



Extensibility

- Plug and play 1s installation
- Metal body, beautiful and long durable
- Easy to configure with Sunways Monitoring App
- Support local and remote monitoring
- IP65, for both indoor and outdoor installation
- Enable mobile monitoring at anytime anywhere

■ PRODUCT INTRODUCTION

GPRS Module



Reliability



Flexibility



Easy to use

- Metal body, beautiful and long durable
- Plug and play 1s installation, no need to set
- Support local and remote monitoring
- IP65, for both indoor and outdoor installation
- External SIM card slot, easier for SIM card replacement
- External antenna, stronger signal and reliable communication
- Enable mobile monitoring at anytime anywhere

Technical Parameters

General Data	
Max. No. of Inverters	1
Inverter Communication	USB3.0
Remote Communication	WIFI (802.11 b/g/n)
Serial Port Communication Rate (bps)	115200
Communication Distance (M)	100 (without obstacles)
External Antenna	SMA water-proof glue stick antenna
Data Intervals	Remote configuration available
Preference Setting	Remote Web、APP
Data Access	Remote server
Working Voltage (V)	DC 5
Working Current (mA)	80 (200 Peak)
Wireless Data	
WiFi Transmitting Power	802.11b: +16 +/-2dBm (@11Mbps)、 802.11g: +14 +/-2dBm (@54Mbps)、 802.11n: +13 +/-2dBm (@HT20, MCS7)
WiFi Receiving Sensitivity	802.11b: -87 dBm (@11Mbps, CCK)、 802.11g: -73 dBm (@54Mbps, OFDM)、 802.11n: -71 dBm (@HT20, MCS7)
WiFi Operating Frequency (GHz)	2.412-2.484
Environmental Data	
Operating Temperature (°C)	-10~+60
Operating Humidity	0%-90% relative humidity, no condensation
Storage Temperature (°C)	-40~+85
Storage Humidity (%)	< 40
Protection Degree	IP65
Other Data	
Dimensions (mm)	156L*52W*30H
Weight (g)	130
Certificates	CE
Warranty	2 years

Technical Parameters

General Data	
Max. No. of Inverters	1
Inverter Communication	USB3.0
External Antenna	SMA water-proof glue stick antenna
Data Intervals	Remote configuration available
Preference Setting	Remote Web、APP
Data Access	Remote server
Working Voltage (V)	DC 5
Working Current (mA)	130 (600 Peak)
Wireless Data	
Wireless Transmitting Power (dbm)	GSM850/EGSM900: 5 ~ 32.5、 DCS1800/PCS1900: 0 ~ 29.5
Wireless Receiving Sensitivity (dBm)	<-108.5
Wireless Operating Frequency	GSM850, EGSM900, DCS1800, PCS1900
GPRS Connection Features	GPRS multi-slot class is 10 (default), GPRS mobile station class B
Environmental Data	
Operating Temperature (°C)	-10~+60
Operating Humidity (%)	0-90 relative humidity, no condensation
Storage Temperature (°C)	-40~+85
Storage Humidity (%)	< 40
Protection Degree	IP65
Other Data	
Dimensions (mm)	156L*52W*30H
Weight (g)	140
Certificates	SRRC
Warranty	2 years

■ PRODUCT INTRODUCTION

LAN Module



Reliability



Flexibility



Easy to use





- Plug and play 1s installation
- Data encrypted to ensure data security
- Supports breakpoint retransmission
- Remote upgrade available
- Stable and reliable data transmission via wired internet cable
- Default dynamic IP mode and static IP commissioning available

Technical Parameters

General Data	
Max. No. of Inverters	1
Inverter Communication	USB3.0
Remote Communication	IEEE802.3 10
Serial Port Communication Rate(bps)	115200
Communication Distance(M)	100 (MAX)
Data Intervals	Remote configuration available
Preference Setting	Remote Web、APP
Data Access	Remote server
Working Voltage(V)	DC 5
Working Current (mA)	100 (220 Peak)
Environmental Data	
Operating Temperature (°C)	-30~+75
Operating Humidity	0%~90% relative humidity, no condensation
Storage Temperature (°C)	-40~+85
Storage Humidity	< 40%
Protection Degree	IP65
Other Data	
Dimensions (mm)	116L*52W*30H
Weight (g)	100
Certificates	CE
Warranty	2 years

■ APPLY SCENARIOS

Generally, Grid connected PV inverters are used on the residential and commercial roof. The PV system consists of photovoltaic array, grid-connected inverter, grid, and load. According to the application scenarios which has been chosen is all power exported to grid or only surplus power exported to the grid to decide whether the load should be connected to the system.

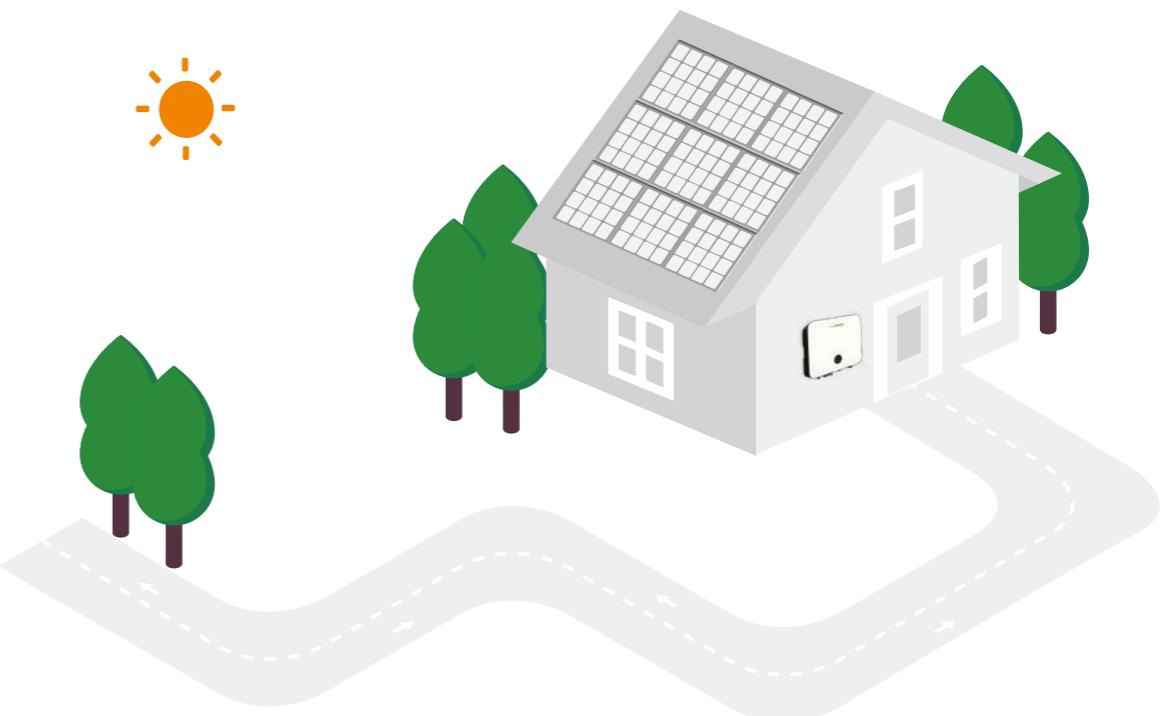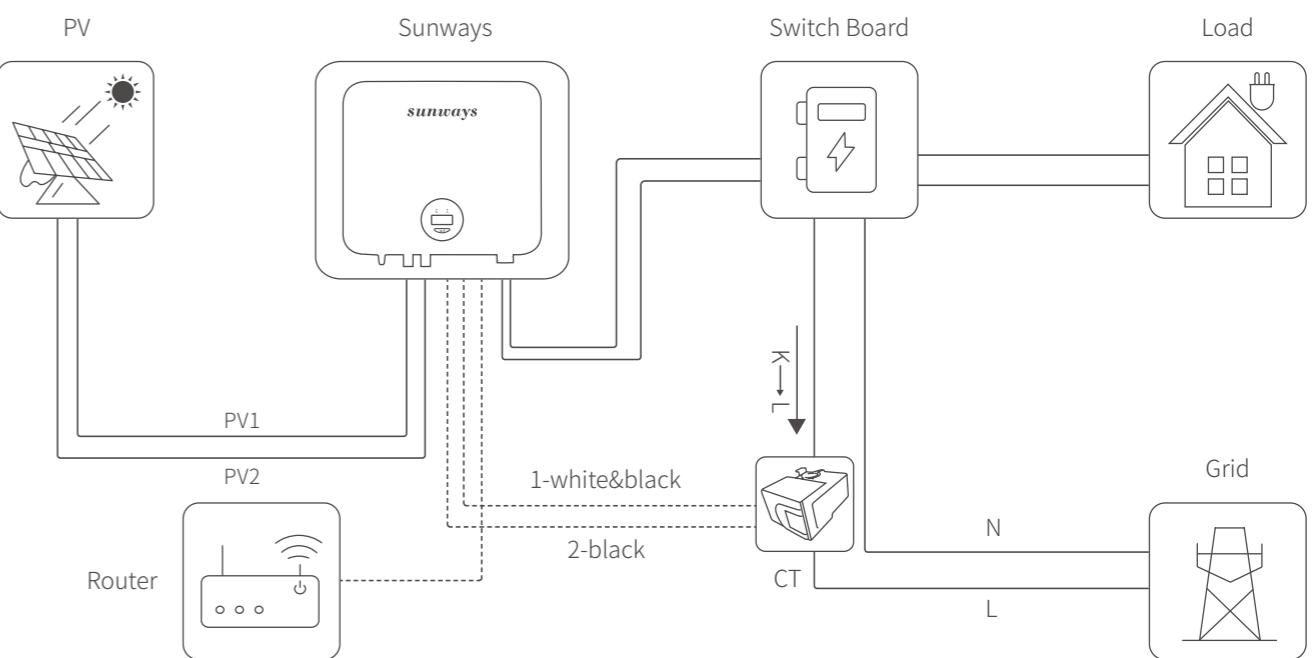

MONITORING 03

WEB See what our portal offers you


- FLEXIBILITY**
Design your own page according to your preference (your zone, your rule).
- USER FRIENDLY**
Automatic alarm notification and multiple language operation supportable.
- PRODUCTIVITY**
Plant/Device/Report checking, diagnosing and management any time anywhere.
- CONTINUITY**
Breakingpoints data recovery up to 14 days, never lose your generation data.



MONITOR.SUNWAYS-TECH.COM

APP

Key features

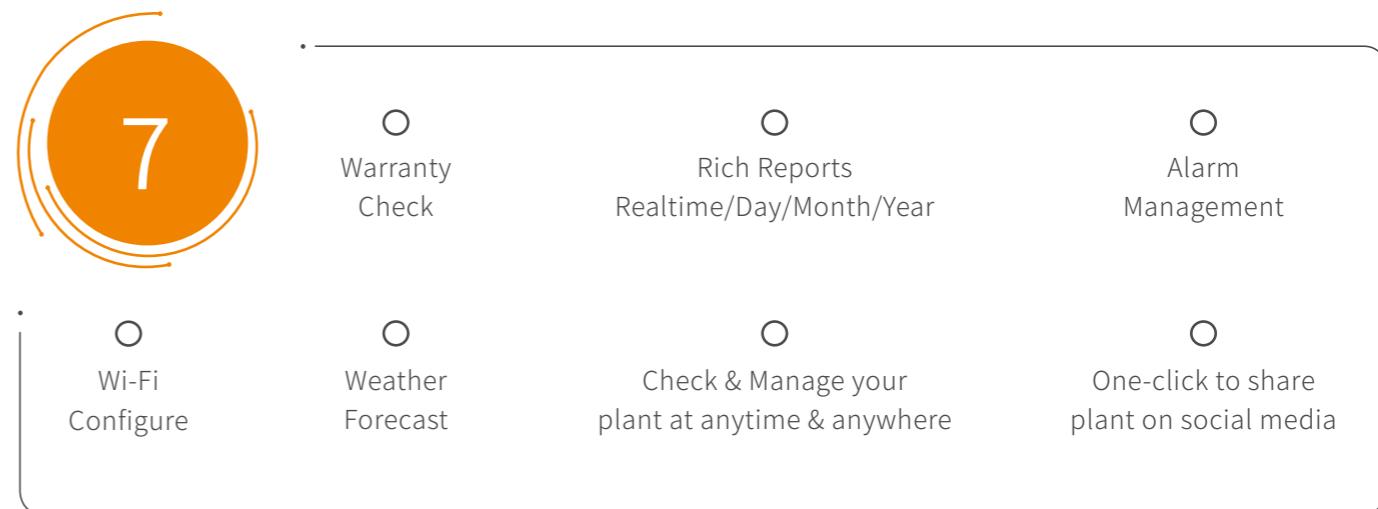

SunwaysHome





SunwaysPro



► MONITORING SYSTEM

04 WHY US

CERTIFICATES

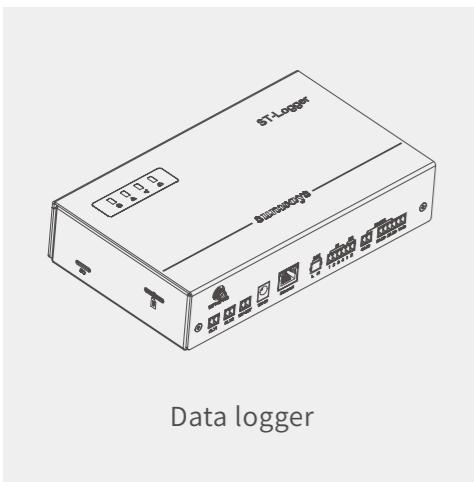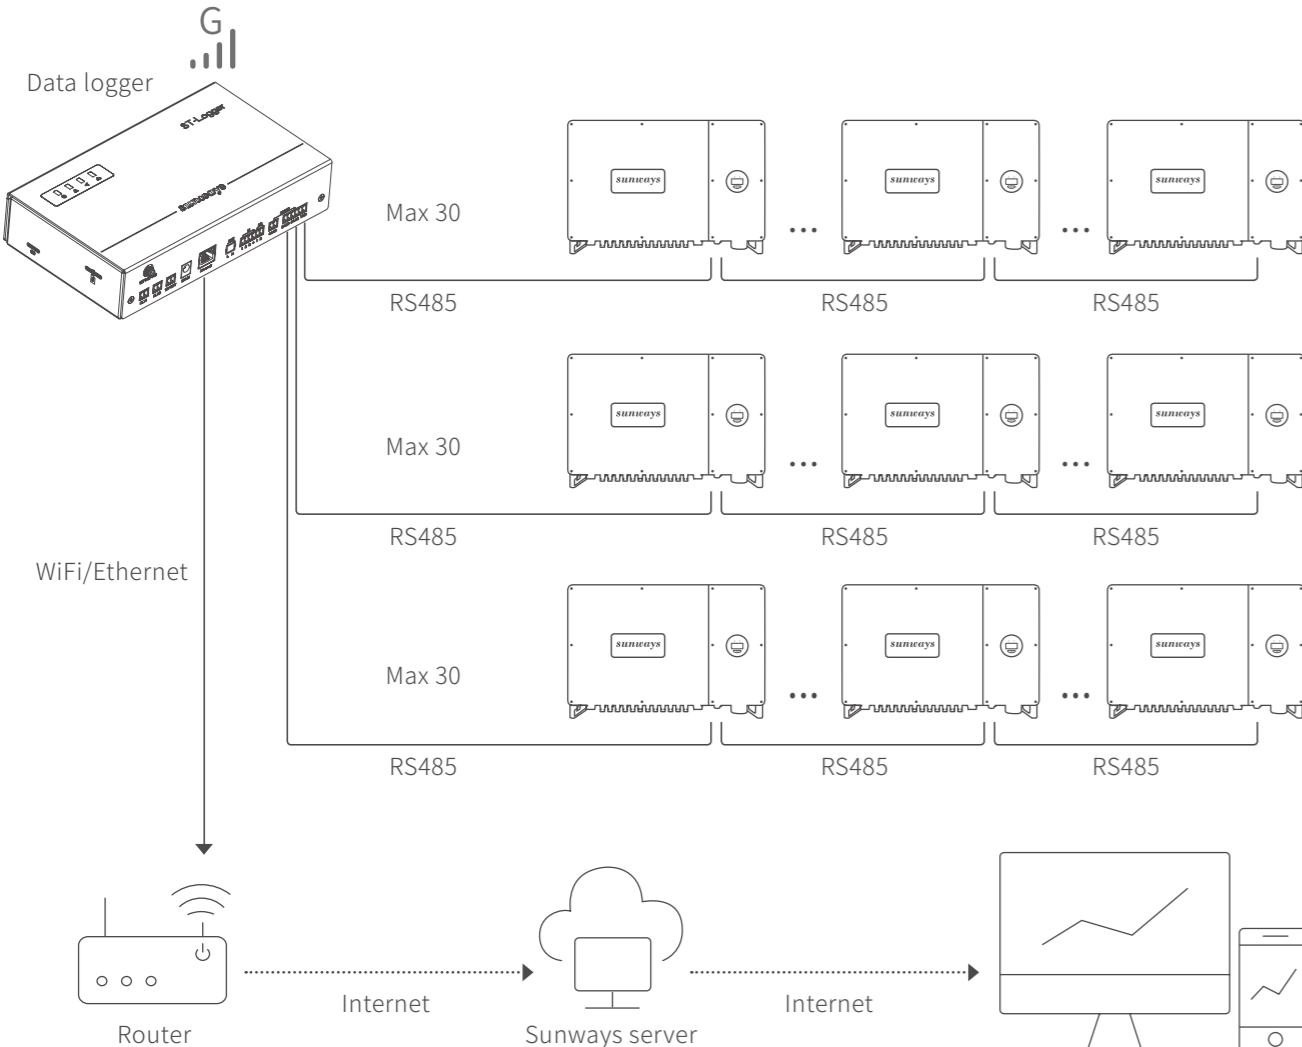

Flexible Networking

- Monitoring of up to 90 devices
- Support of RS485, Ethernet, WiFi and GPRS communication
- Support of energy meter, meteo station, sensors and other equipment access

Convenient O&M

- Active and reactive power control
- 100% data availability through 24/7 operations
- Inverter batch parameter setting and firmware updates
- Plant maintenance by remote Web access, optimized OPEX



C10-1

EN61000

EN50549



EN62109

IEC62109

CEI 0-21




For more latest certificates, please visit us at www.sunways-tech.com to download.

► SUPPORT

05 CASE STUDY


One-stop Solution

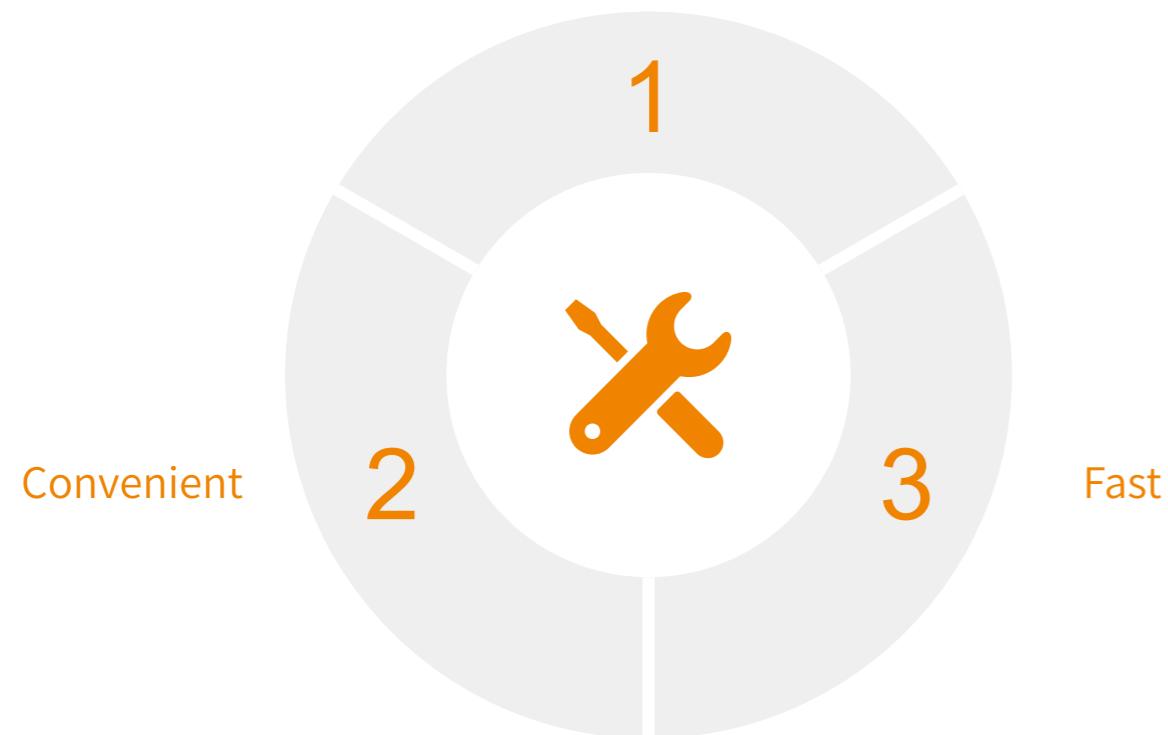

► Convenient



► Fast

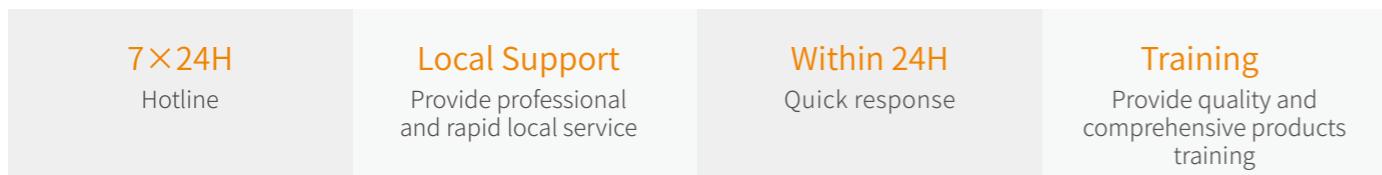

Project Address:Lishui, China

Project Capacity:3.168MW

Inverter:48 sets of Sunways STT 60kW inverter



Project Address:Cixi, China

Project Capacity:1.1MW

Inverter:20 sets of Sunways STT 50kW inverter



Project Address:Serra, Brazil

Project Capacity:390kW

Inverter:6 sets of Sunways STT 60kW inverter



Project Address:Gujarat, India

Project Capacity:5kW

Inverter:1 set of Sunways STS 5kW inverter



Project Address:Tan Thanh, Baria-VungTau, Vietnam

Project Capacity:240kW

Inverter:4 sets of Sunways STT 60kW inverter



Project Address:Danang, Vietnam

Project Capacity:100kW

Inverter:4 sets of Sunways STT 25kW inverter



Project Address:Cixi, China

Project Capacity:1MW

Inverter:16 sets of Sunways STT 60kW inverter




Project Address:Silang Cavite, Philippines

Project Capacity:64.8kW

Inverter:2 sets of Sunways STT 33kW inverter



Project Address: Prague, Czech Republic
Project Capacity: 8kW
Inverter: 1 set of Sunways STH 8kW inverter

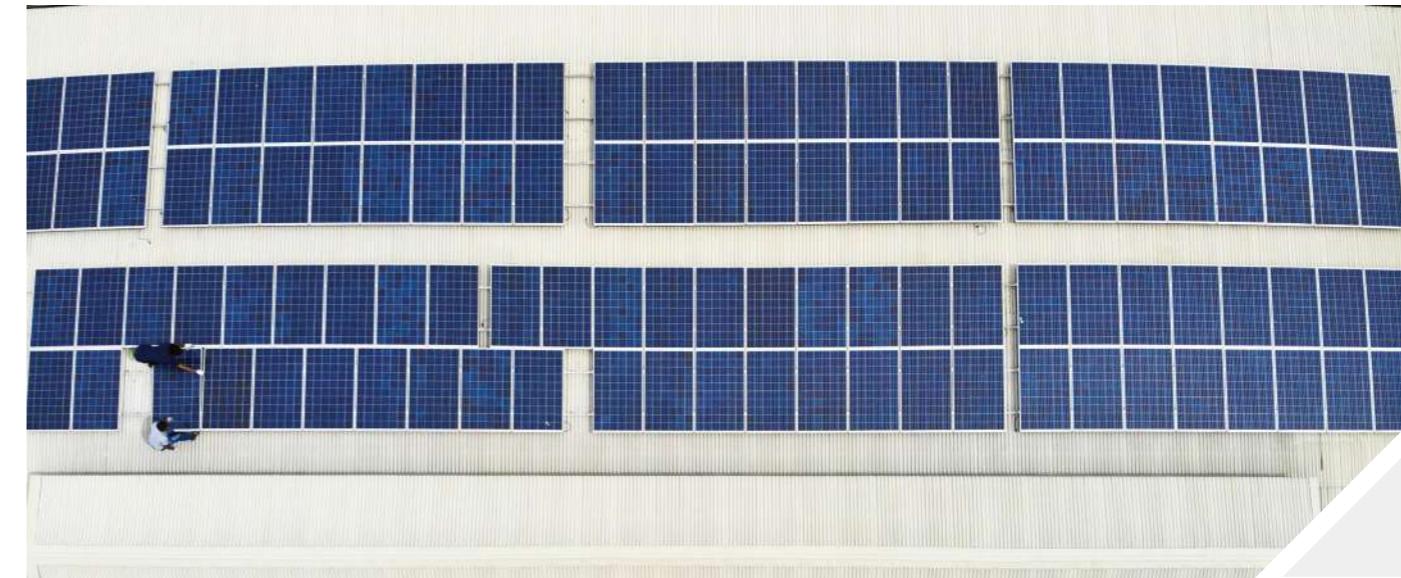

Project Address: Rio de Janeiro, Brazil
Project Capacity: 300kW
Inverter: 5 sets of Sunways STT 60kW inverter



Project Address: Island Vir, Croatia
Project Capacity: 8kW
Inverter: 1 set of Sunways STT 10kW inverter



Project Address: Tzaneen, South Africa
Project Capacity: 120kW
Inverter: 8 sets of Sunways STT 17kW inverter



Project Address: Drnis, Croatia

Project Capacity: 10kW

Inverter: 1 set of Sunways STT 10kW inverter



Project Address: Colombo, Sri Lanka

Project Capacity: 7.4kW

Inverter: 2 sets of Sunways STS 3kW inverter



sunways



WeChat



SunwaysHome



SunwaysPro

NINGBO SUNWAYS TECHNOLOGIES CO.,LTD.

Tel: +86 400 9922 958

Email: info@sunways-tech.com

Website: www.sunways-tech.com

Add: No. 1, Second Road, Green Industrial Zone,
Chongshou Town, Cixi City, ZheJiang Province, PRC

Text and images correspond to the current state of technology at the time of printing. Subject to modifications.
All information is without guarantee in spite of careful editing - liability excluded. Copyright ©Sunways. All rights reserved.